



PULTRUDED GRATINGS

I-4010

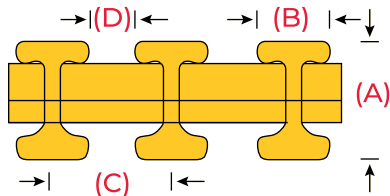


(A) Depth	(B) T-width	(C) Distance / Centers	(D) Clearance / T	% Opening	lb/ft
1"	5/8"	1"	3/8"	40	3.64

I-4015

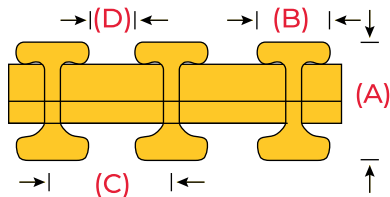


(A) Depth	(B) T-width	(C) Distance / Centers	(D) Clearance / T	% Opening	lb/ft
1 1/2"	5/8"	1"	3/8"	40	4.50

I-6015

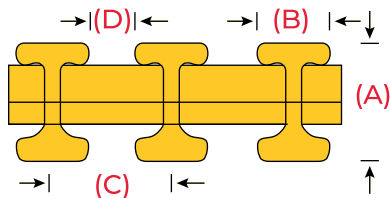

(A) Depth	(B) T-width	(C) Distance / Centers	(D) Clearance / T	% Opening	lb/ft
1 1/2"	5/8"	1"	7/8"	60	3.31

T-3320

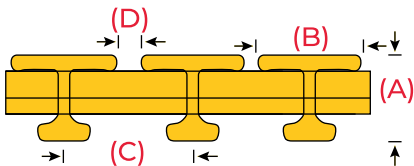


(A) Depth	(B) T-width	(C) Distance / Centers	(D) Clearance / T	% Opening	lb/ft
2"	1"	1 1/2"	1/2"	33	4.44


Maximum Concentrated Recommended Load
in Pounds / Sq Feet / Wide on the following Span Clearance

Ref.	Mesh Opening	18 Inches Span	24 Inches Span	36 Inches Span	48 Inches Span
I-4010	40%	1,690	1,321	881	655
I-4015	40%	2,663	1,946	1,301	922
I-6015	60%	1,741	1,331	860	619
T-3320	33%	1,639	767	430	276

KICK PLATE PROFILE

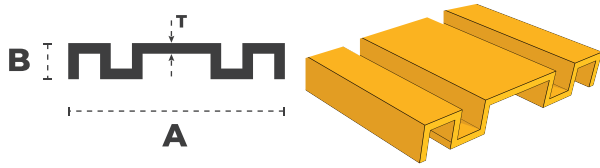


M - Type Dimension (in)			Weight (lb/ft)
A	B	T	
4	1/2	1/8	0.73
4	3/4	3/16	0.87
6	1/2	3/16	0.85
6	1/2	1/8	0.80

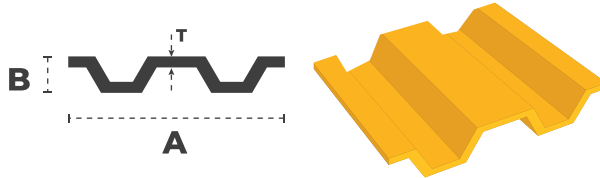


W - Type Dimension (in)			Weight (lb/ft)
A	B	T	
6	3/4	1/8	1.00
8	1/2	1/8	1.07

C - PROFILE

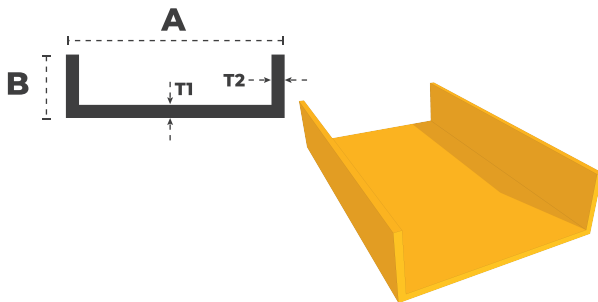



Dimension (in)				Weight (lb/ft)
A	B	T1	T2	
6	2	3/8	3/8	2.70
8	2	3/8	3/8	3.83
11 1/2	3 1/2	3/4	3/8	6.53
14	2 3/4	1/2	3/8	7.45

I - PROFILE

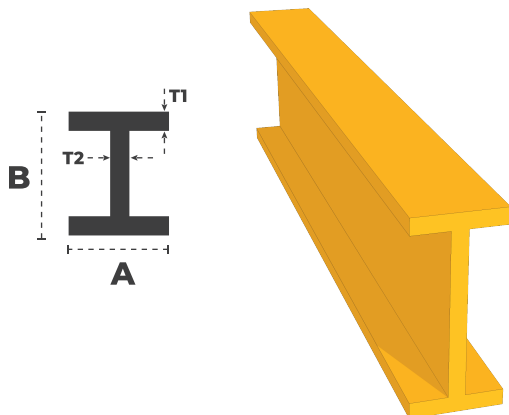



Dimension (in)				Weight (lb/ft)
A	B	T1	T2	
3	6	1/4	1/4	2.51
3	6	3/8	3/8	3.57
4	8	3/8	3/8	4.8
4	8	1/2	1/2	6.3
5	10	3/8	3/8	6.04
5	10	1/2	1/2	7.99
6	12	3/8	3/8	7.19
6	12	1/2	1/2	9.60

H – PROFILE

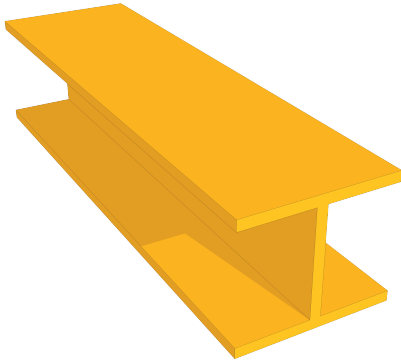



Dimension (in)				Weight (lb/ft)
A	B	T1	T2	
3	3	1/4	1/4	1.79
4	4	1/4	1/4	2.41
4	4	3/8	3/8	3.02
6	6	1/4	1/4	3.64
6	6	3/8	3/8	5.44
8	8	3/8	3/8	7.25
8	8	1/2	1/2	9.60
10	10	3/8	3/8	9.13
10	10	1/2	1/2	12.3
12	12	1/2	1/2	14.44

SQUARE – PROFILE

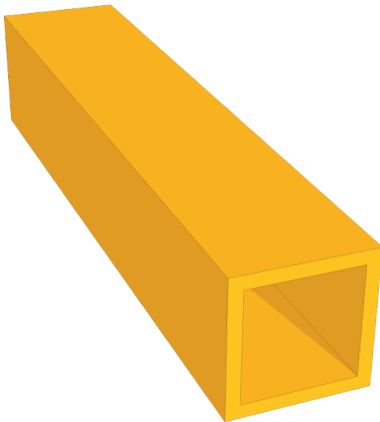



Dimension (in)				Weight (lb/ft)
A	B	T1	T2	
1	1	1/4	1/4	0.60
1 1/4	1 1/4	1/4	1/4	0.83
1 1/2	1 1/2	1/4	1/4	1.03
1 3/4	1 3/4	1/4	1/4	1.22
2	2	1/4	1/4	1.42
2 1/2	2 1/2	1/4	1/4	1.88
3	3	1/4	1/4	2.27
3 1/2	3 1/2	1/4	1/4	2.75
4	4	3/8	3/8	3.09
5	5	1/4	1/4	3.96
5	5	3/8	3/8	4.03
6	6	1/4	1/4	4.77
6	6	1/2	1/2	6.98

RECTANGULAR PROFILE





Dimension (in)				Weight (lb/ft)
A	B	T1	T2	
3	2	3/16	3/16	1.67
4	3	3/16	3/16	2.18
6	4	1/4	1/4	3.89

ROUND – PROFILE





Dimension (in)		Weight (lb/ft)
D (Diameter)	T (Thicknss)	
1 1/2	1/4	0.79
2	1/4	1.12
3	1/4	1.77
4	1/4	2.43

FLAT PROFILE

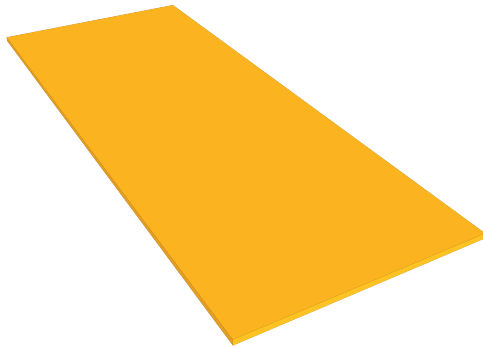



Dimension (in)		Weight (lb/ft)
A (Width)	T (Thicknss)	
1	1/4	0.26
2	1/4	0.39
2	3/8	0.51
2	1/2	0.96
2 1/2	1/2	1.21
3	3/8	0.95
4	1/4	0.87
5	1/4	1.03
6	3/8	1.96
6	3/4	3.96

L – UNEVEN ANGLE




Dimension (in)				Weight (lb/ft)
A	B	T1	T2	
2	3/4	1/4	3/8	0.80
4	2	1/4	3/8	1.20
6 1/2	3/8	3/8	3/8	2.61
7	3	3/8	3/8	2.95

EQUAL ANGLE

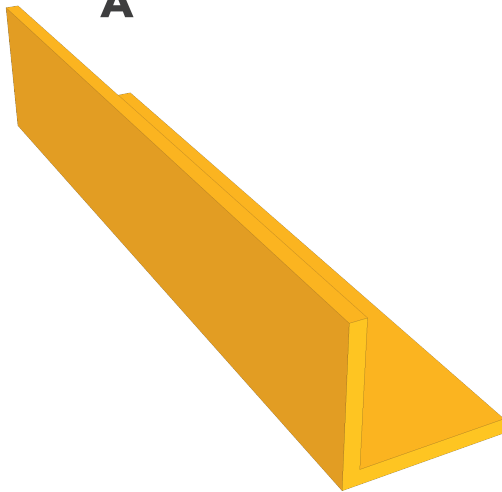

Dimension (in)				Weight (lb/ft)
A	B	T1	T2	
1	1	1/4	1/4	0.37
1 1/4	1 1/4	3/16	3/16	0.38
1 1/2	1 1/2	3/16	3/16	0.45
1 1/2	1 1/2	1/4	1/4	0.57
2	2	1/4	1/4	0.76
3	3	3/16	3/16	0.92
3	3	1/4	1/4	1.18
3	3	3/8	3/8	1.72
3	3	1/2	1/2	2.28
4	4	1/4	1/4	1.67
4	4	3/8	3/8	1.98
4	4	1/2	1/2	3.07
6	6	1/4	1/4	2.43
6	6	3/8	3/8	3.64
6	6	1/2	1/2	4.71

ANTI SLIP STAIR PROFILE

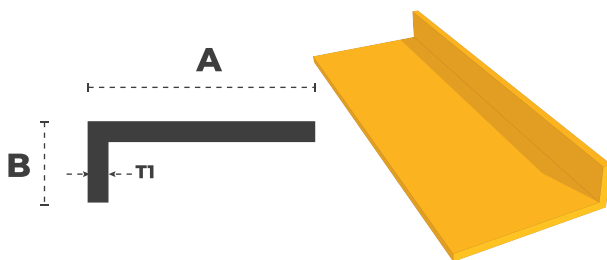

Stair nosing			Weight (lb/ft)
A	B	T1	
3	1 1/4	1/8	0.73

